

KONIG
ELECTRONIC

SEC-PH370



MANUAL (p. 2)
Door Viewer Camera

ANLEITUNG (S. 6)
Kamera-Türspion

MODE D'EMPLOI (p. 10)
Caméra de judas de porte

GEBRUIKSAANWIJZING (p. 14)
Deurviewer Camera

MANUALE (p. 18)
Visore a Videocamera per porta

MANUAL DE USO (p. 22)
Cámara de Visor de Puerta

HASZNÁLATI ÚTMUTATÓ (o. 26.)
Ajtókamera

ΚΑΥΤΤΟΟΗJE (s. 30)
Ovikamera

BRUKSANVISNING (s. 34)
Dörrkamera

ΝΑΒΟD K ΠΟΥΖΙΤÍ (s. 38)
Dveřní kamera


MANUAL DE UTILIZARE (p. 42)
Caméra de supraveghere ușă

ΕΓΧΕΙΡΙΔΙΟ ΧΡΗΣΗΣ (σελ. 46)
Θυροτηλεόραση

BRUGERVEJLEDNING (s. 50)
Dør overvågningskamera

VEILEDNING (s. 54)
Dørkamera


ENGLISH

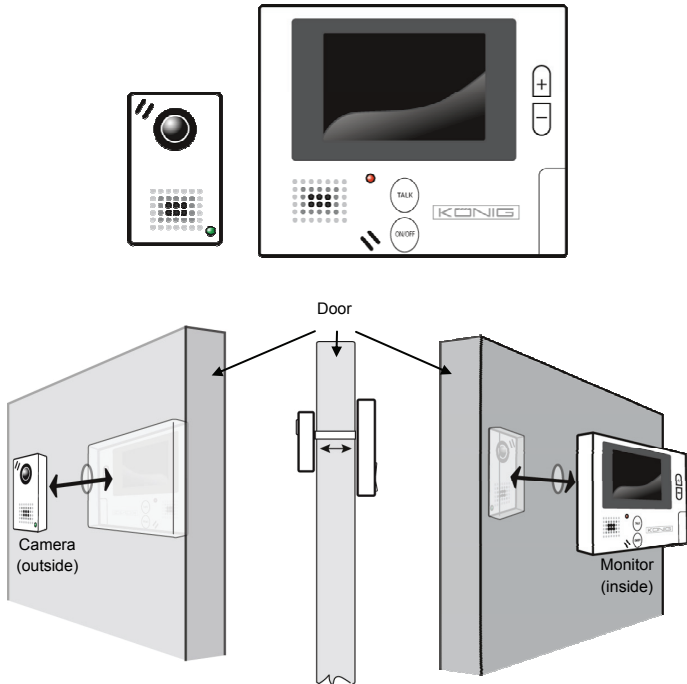

Introduction:

The door viewer camera is an electronic video system that enables you to see who's at the front door. Feel more secure before opening the door. The integrated intercom provides two way communication with the visitor. The 2.8" monitor gives a clear view and has 3x digital zoom function for detailed viewing. The door viewer camera is easy to install in an existing door and requires no wiring.

Monitor and Camera Description:

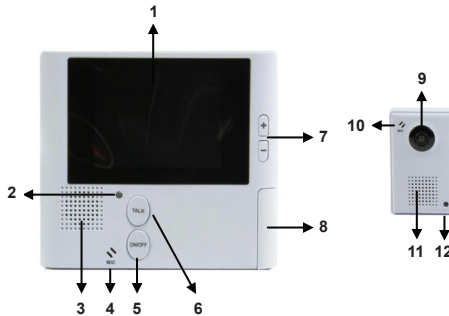


- | | |
|--------------------|------------------------|
| 1. LCD monitor | 7. Zoom IN/OUT button |
| 2. Power indicator | 8. Battery compartment |
| 3. Loudspeaker | 9. Camera lens |
| 4. Microphone | 10. Microphone |
| 5. ON/OFF button | 11. Loudspeaker |
| 6. TALK button | 12. Power indicator |


Installation:

Before installing the door viewer camera it is recommended to first check the correct operation of the door viewer camera. Insert 3x AAA batteries in the battery compartment and connect the camera to the monitor. Push the ON/OFF button and the monitor must show the picture of the camera. Check the intercom function (TALK button) and the zoom function.

1. Check the height for the installation of the camera carefully before drilling a hole in the door. The recommended height is between 1.60 m and 1.75 m. (door thickness, between 35 mm and 55 mm)
2. Drill a hole of ± 15 mm through the door.
3. Take off the cover sheet of adhesive tape.
4. Insert the tube with the flat cable through the opening in the door.
5. Push the camera unit against the door so that the camera unit is attached to the door with the adhesive tape. Be sure there is enough space around the tube for the nut to tighten the camera and the back plate.
6. Pull off the covers of the round adhesive tapes at the back side of the back plate and position the back plate to the door with the opening in the middle of the hole from the door. Be sure that the connector on the back plate for the flat cable is on the left side (see image).

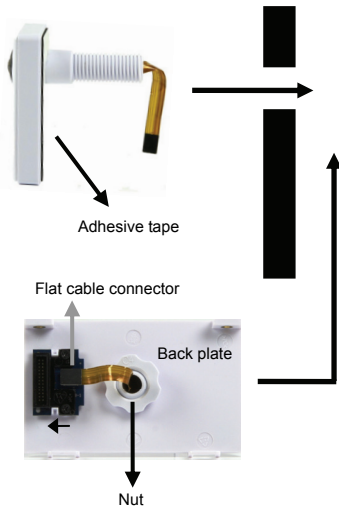

7. To tighten the camera and back plate firmly, screw the nut via the back plate to the tube of the camera.
8. Connect the connector of the flat cable to the connector on the back plate as shown in the image.
9. At the back side of the monitor is the monitor connector. This connector fits into the connector on the back plate. (See previous image).

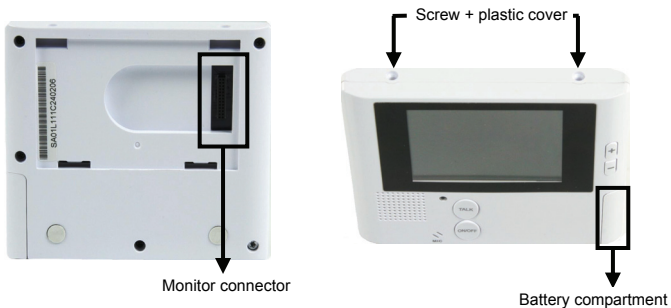

Place the monitor on the back plate and make sure the monitor is pushed correctly on the back plate.

Note: the monitor is correctly placed if there is no longer any space between the door and the monitor.

10. After attaching the monitor to the back plate, it must be secured with two screws at the top of the monitor. The screws can be covered with the plastic covers that can be found inside the packaging together with the screws.
11. Open the battery compartment by sliding the cover downwards. Insert 3x AAA 1.5 V batteries. Close the battery compartment.
12. The door viewer camera is now ready to use.

Operation:

1. When somebody pushes the existing house doorbell, it is possible to view who is at the front door.
2. Push the ON/OFF button to power ON the monitor. The power indicator lights up green and the monitor turns on.

Note: if no button is pushed, the monitor will turn off after ± 35 seconds. This saves battery power.

3. Push the TALK button to open the intercom and to communicate with the visitor.
4. Push the Zoom IN/OUT button to zoom in for a better view of the visitor.
5. When finished, push the ON/OFF button to switch off the camera door viewer.

Specifications:

- Monitor: 2.8" LCD, colour
- Camera resolution: 300K pixels
- Viewing angle: 105°
- Water protected camera: IP44
- Power: 3 x AAA 1.5 V battery
- Battery life: 5 Months (5 x 40 seconds per day)
- Door thickness: Between 35 mm and 55 mm
- Monitor dimensions: 109x96x17 mm
- Camera dimensions: 62x40x12 mm
- Operating temperature: -10°C ~ 50°C
- Working humidity: 10% ~ 95%

Safety precautions:

This product should ONLY be opened by an authorized technician when service is required.

Disconnect the product if a problem should occur. Do not expose the monitor to water or moisture.

Maintenance:

Clean only with a dry cloth. Do not use cleaning solvents or abrasives.

Warranty:

No guarantee or liability can be accepted for any changes and modifications of the product or damage caused due to incorrect use of this product.

General:

Designs and specifications are subject to change without notice.

All logos brands and product names are trademarks or registered trademarks of their respective holders and are hereby recognized as such.

Keep this manual and packaging for future reference.